

POLarization-diversity Doppler Radars On Satellites (POLYDOROS)




Principal Investigators:

- Peter Huggard, John Bradford (STFC RAL, UK)
- Alessandro Battaglia (University of Leicester, UK)

Presented by N. Humpage


Requirement for wind field observations

- Three user communities with requirement for improved wind field observations (particularly spatial and temporal coverage):
 - NWP and data assimilation
 - Hurricanes
 - Cloud modelling
- Current/proposed observation techniques:
 - **ADM-Aeolus**: Doppler lidar, provides global coverage but low frequency of observation, unable to observe within clouds
 - **Visible/IR (spectral) imaging from GEO, e.g. from GOES**: infer wind speeds from movement of clouds in successive images (every 7.5 minutes), altitude determination is problematic... spectral imaging (e.g. from MTG-IRS) would improve this whilst maintaining high frequency of observation and good spatial resolution, albeit over only one portion of the globe
 - **Scatterometers, e.g. QuikSCAT**: active radar (14 GHz) technique measures wind speeds just above the ocean surface under clear and cloudy conditions

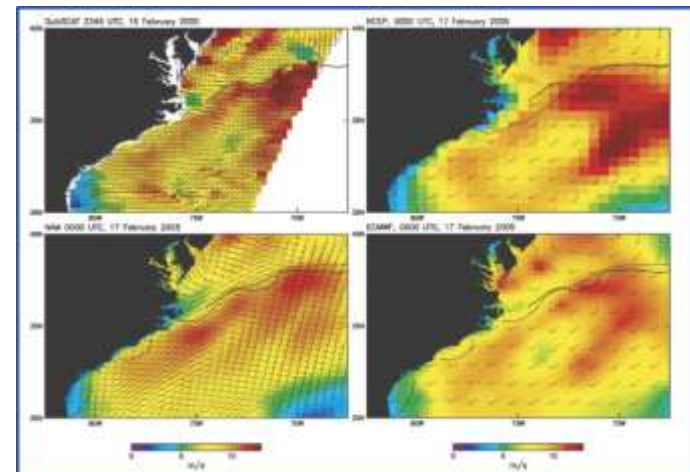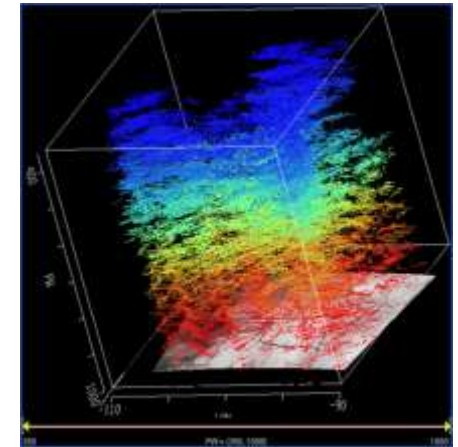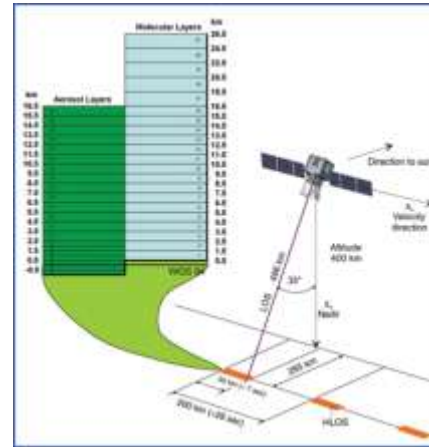

Conically scanning W-band radar

Different conically scanning W-band polarization diversity radars concepts have been previously studied by ESA (Thales-Alenia and Wivern study). Only slight differences in viewing configuration.

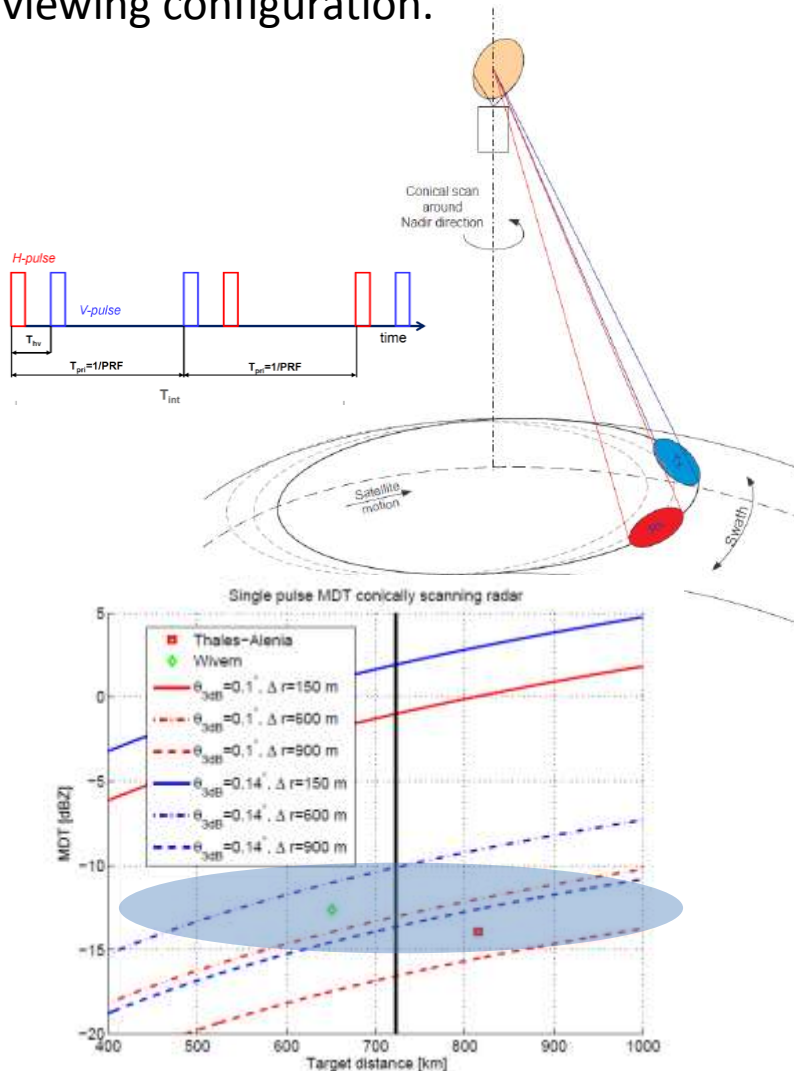


Frequency	94 GHz
Peak power	1 kW
Satellite height	550(500 – 600) km ($v_{sat} = 7.7 \text{ kms}^{-1}$)
Incidence angle	42.5[41.7° – 45°](scanning angle = 38.5[37.8 – 40.2]°)
Swath	900(800 – 1050) km
Distance from ground	723(651 – 815) km
Antenna rotation velocity	8.6/13 RPM Footprint velocity 354/612.3 km/s
Antenna diameter	1.59 – 2.23 m ($\theta_{3dB} = 0.14^\circ - 0.1^\circ$)
Antenna side lobes	< 30 dB
Pulse-length	3 – 6 μsec ($\Delta r = 450 - 900\text{m}$)
Pair separation	TBD(V_{Nyq} accordingly)
PRF_{pairs}	3000-3600Hz [50-41.6 km slant-range ambiguity]
Total system losses	6dB
Integration time	TBD
Receiver bandwidth	according to pulse-length
Noise figure	6.5 dB

In this project: 1) in-depth **error budget study**
 2) Advantage of adding **pulse compression**

Error budget

Doppler measurements are affected by a variety of errors, ranging from noise to multiple scattering, non uniform beam filling, aliasing, and pointing errors.

$$\epsilon_{TOT}^2 = \epsilon_N^2 + \epsilon_{NUBF}^2 + \epsilon_{aliasing}^2 + \epsilon_{MS}^2 + \epsilon_{pointing}^2 \quad \text{Total quadratic error}$$

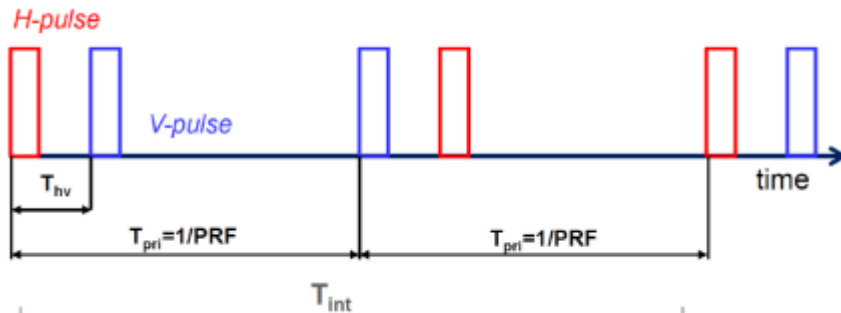


PD ensures that we get rid of aliasing!


$$T_{hv}=5\mu\text{sec} \rightarrow v_{Ny}=160 \text{ m/s}$$

$$T_{hv}=20\mu\text{sec} \rightarrow v_{Ny}=40 \text{ m/s} \quad (\text{no aliasing for wind up to } 203 \text{ km/h})$$

But cross-talk introduced by multiple scattering, depolarizing atmospheric targets, ground clutter, instrument cross talk must be reduced $\rightarrow$ V and H signal transmitted with opposite slopes

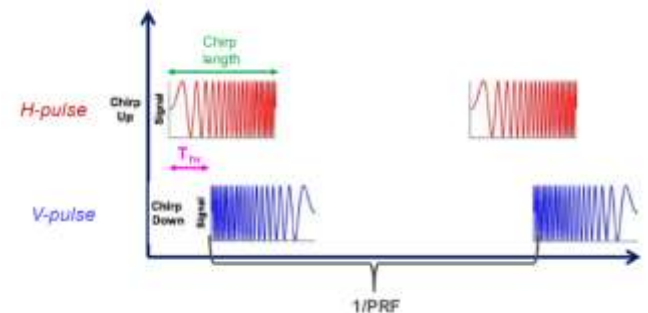


Range sidelobes for pulse compression


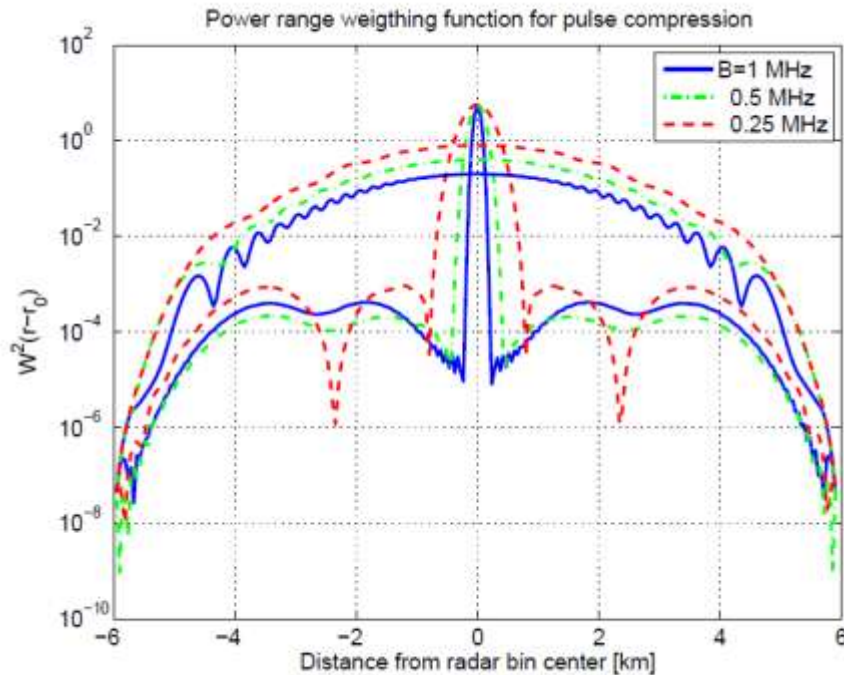


Surface type	Cross section	Range sidelobe level
Land, typical	-10 dB	-39 dB
Land, worst case	-5 dB	-44 dB
Sea, typical	-15 dB	-34 dB
Sea, worst case	-10 dB	-39 dB
Snow, typical	0 dB	-49 dB
Snow, worst case	3 dB	-52 dB





Pulse compression with sidelobe suppression approaching 40 (50) dB for a 0.25 (1) MHz chirp bandwidth can be achieved. This is adequate for this application, especially over sea surfaces characterized by very low σ_0 . The 2 chirp mode offers some improvement in Doppler accuracy by reducing crosstalk between H and V -polarized channels

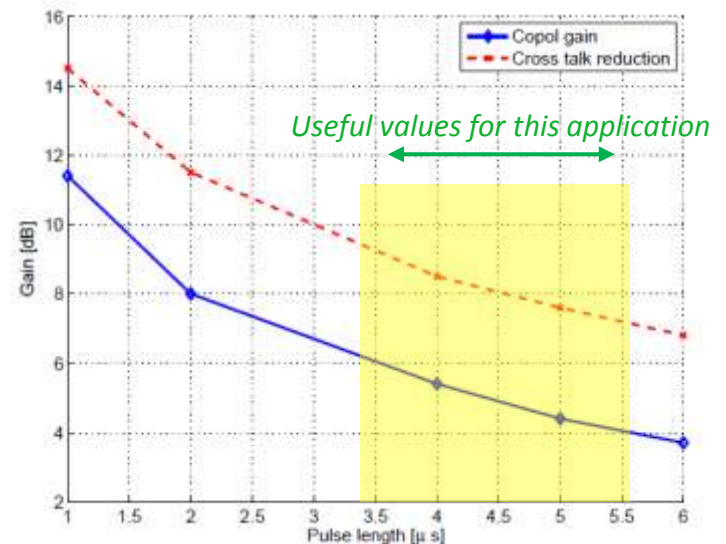

Hurricane Karl simulation

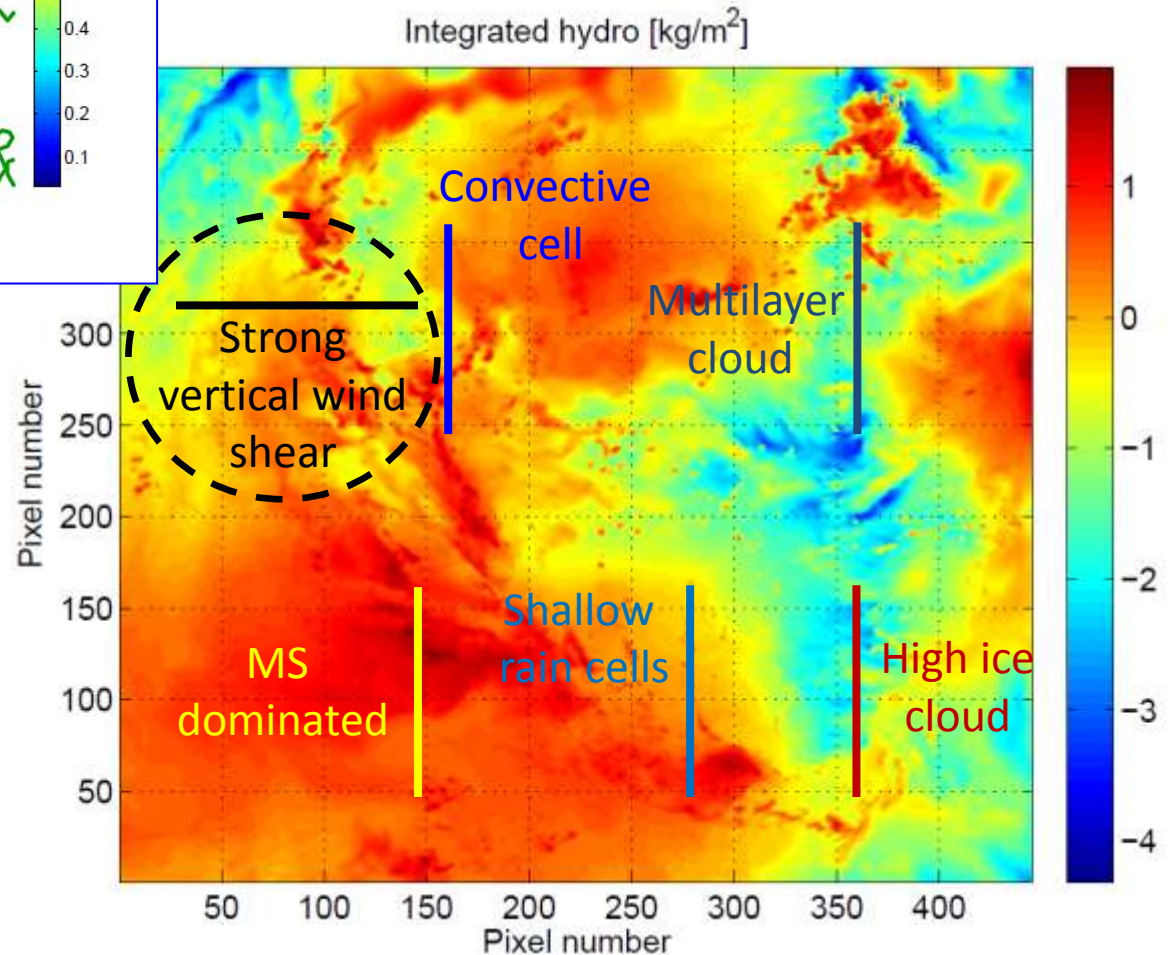
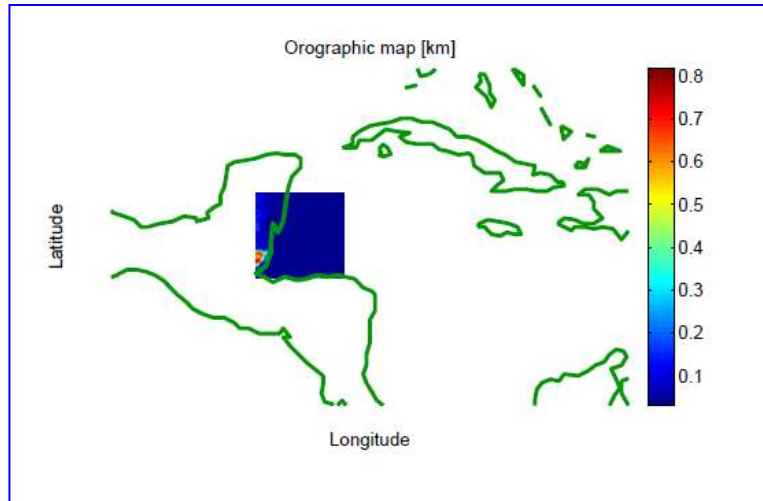


Forward view: strong vertical wind shear

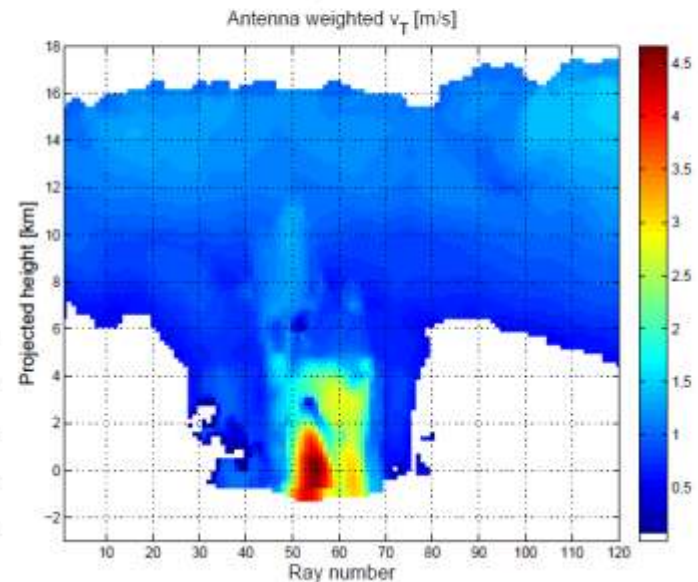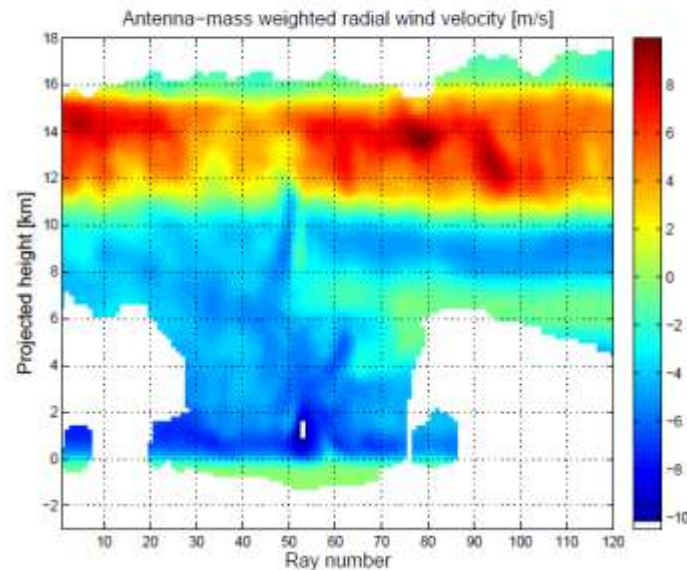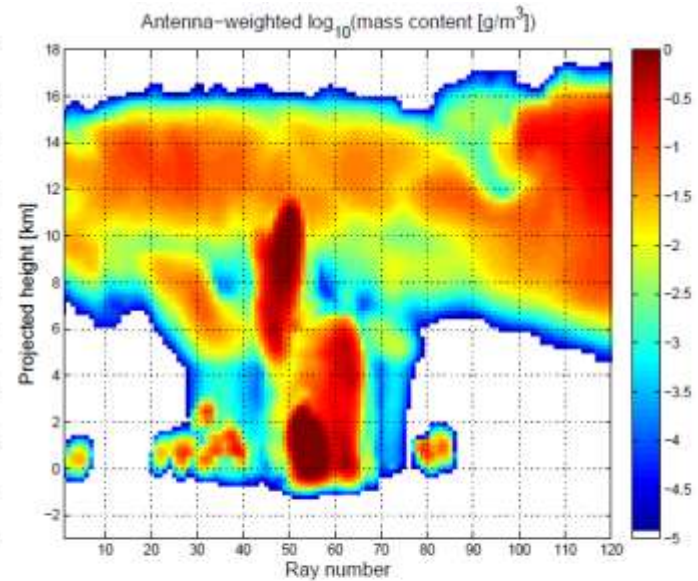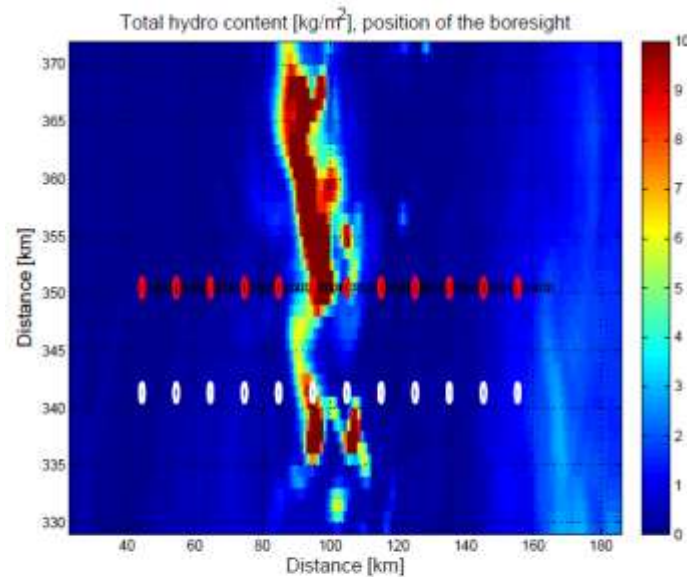



-ve: approaching
+ve: receding

Forward modelling

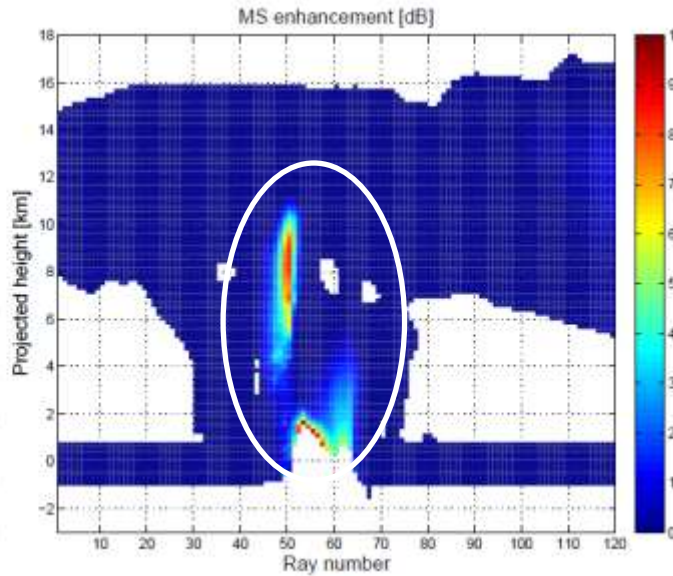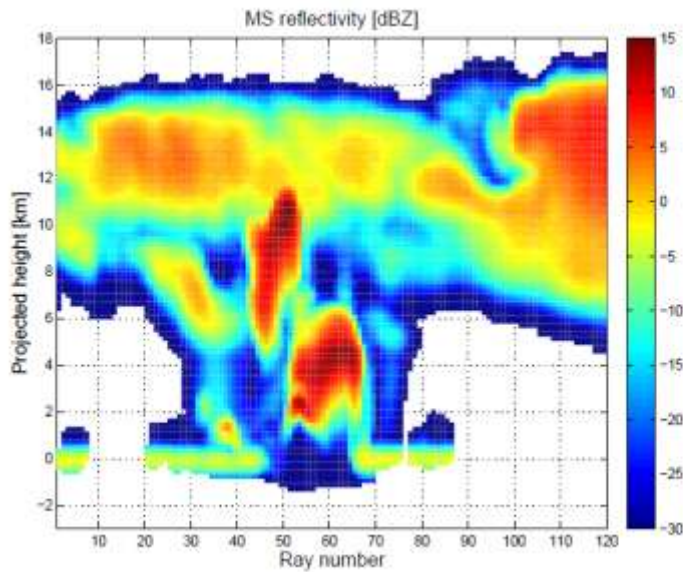

MS effects is relevant in convective cores: in such regions it tend to produce errors of the order of 1-2 m/s even when averaging at 10 km distance (convective scale).

-ve: approaching
+ve: receding

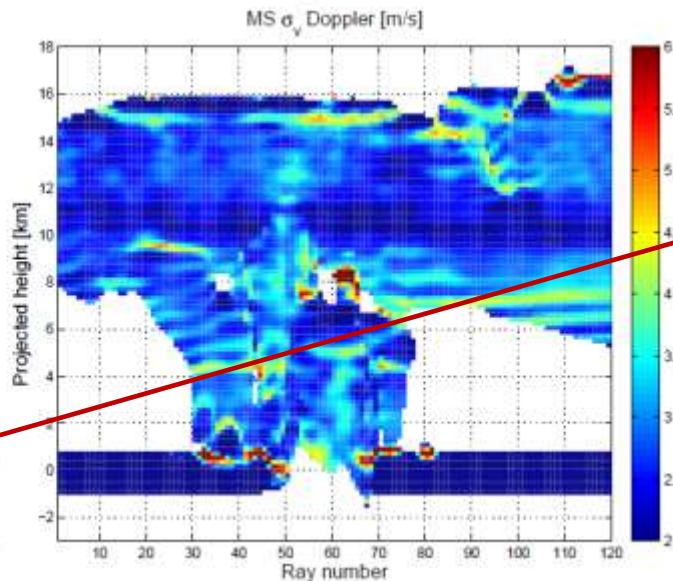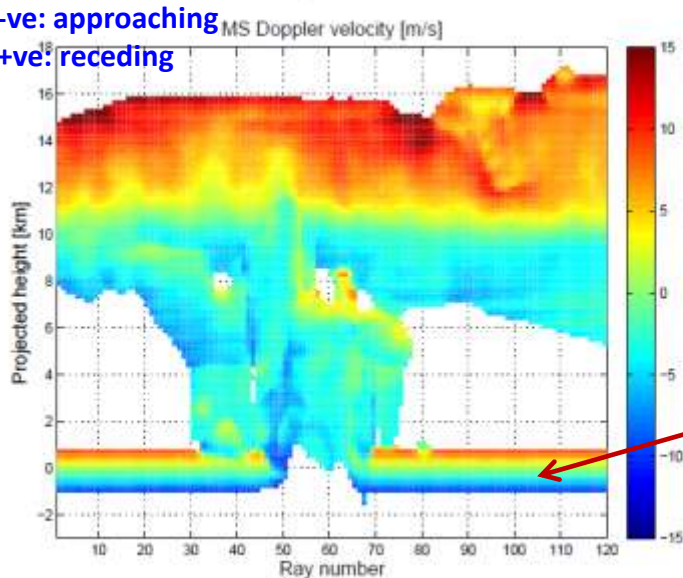


At forward view surface appears to have $V_D \neq 0$

Spectral widths = 3 to 3.5 m/s (smaller than at side view)

When first seen at projected height > 0 the surface appears moving downward




Noise and NUBF error at 1 and 10 km integration

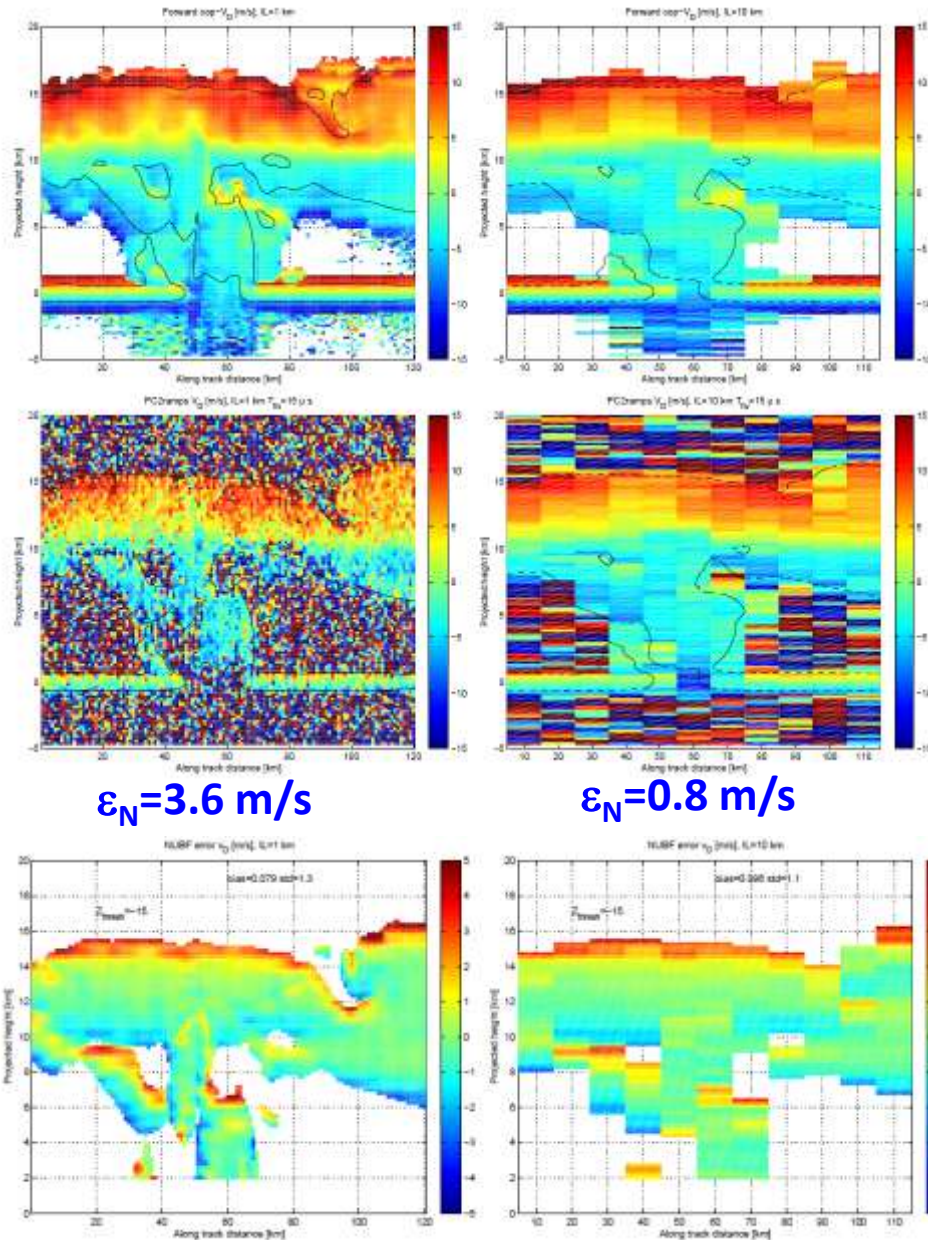

The vertical shear is well captured!
 There is a significant reduction of ϵ_N (typically below 1 m/s) when averaging for 10 km (with optimal T_{hv} around 10-20 μs).

NUBF seems to be the main driver of errors with increasingly importance when moving towards the forward/backward section of the scan. Since clouds are horizontally stratified averaging along footprint track is not mitigating the problem. Biases up to 3 m/s are expected in correspondence of regions with vertical reflectivity inhomogeneity.

Gain in coverage (based on CloudSat)

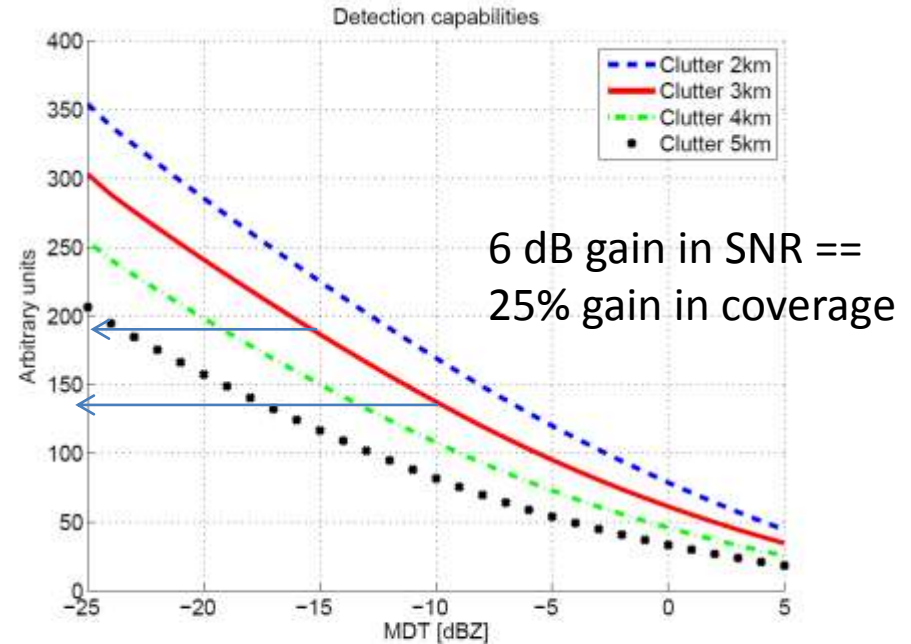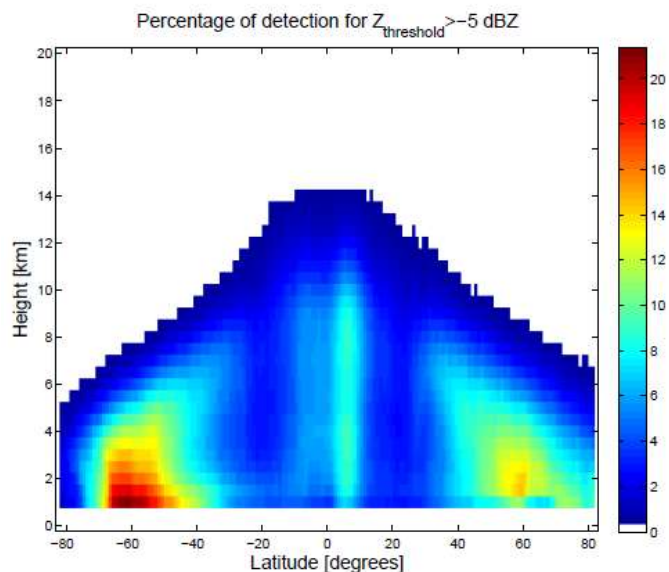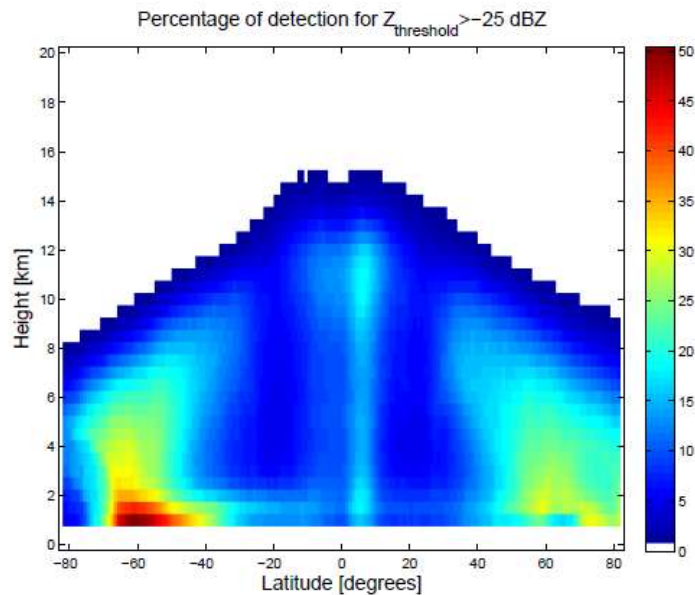

These figures assess the degradation in detection for a radar system with lower sensitivity and higher clutter height than those achieved for the CloudSat radar. Roughly speaking passing from an *MDT* value of -25 dBZ to *MDT* equal 5 dBZ reduces the detection capability by a factor of 8 to 11 (with clutter height ranging between 2 and 5 km).

Conclusions

- Obvious **benefit for larger antenna size** (but less coverage)
- **NUBF seems to be the main driver of errors** (bottleneck) with increasingly important effect going towards forward/backward viewing directions and with increasing sensitivity. There are no strategies in place to correct for it! **Averaging along footprint track is not a panacea**
- **Noise errors can be brought down to less than 1-1.5m/s for 10 km integration** (even for the 13 RPM system) for signal above -10 dBZ (preliminary analysis show that this corresponds to ~ 40% of CloudSat detection)
- Pulse compression works fine with peak to sidelobe of ~40 dB (but only ocean surfaces considered up to now).
- 2-chirp mode. Not essential but the benefit may increase in presence of larger depolarization effects (e.g. brighter surfaces/MS cells).

Pulse compression is a plausible option for a conically scanning W-band polarization diversity radar system. The key advantage of such systems is the low reflectivity of ocean surfaces at slant incidence angles, which poses less stringent constraints onto range side-lobe suppression. A system with a bandwidth of 0.25 MHz, with a chirp length of 40 μ s and with T_{hv} in the range between 10 and 20 μ s provides a good balance between vertical resolution, Doppler accuracy and coverage. We expect that such system will provide useful Doppler (accuracies better than 2 m/s) at 1 km vertical resolution and 10km integration on roughly half of the cloudy regions as detected by CloudSat.