Geosynchronous SAR: System & Applications

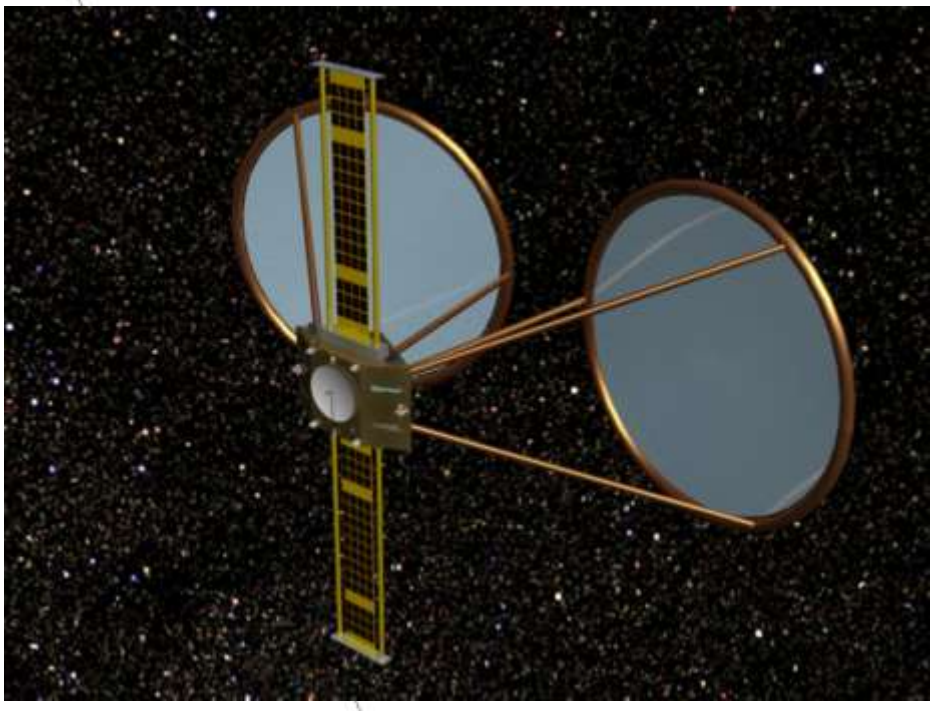

23 January 2013

Dr Steve Hobbs
Director
Cranfield Space Research Centre

www.cranfield.ac.uk/soe/space
s.e.hobbs@cranfield.ac.uk

Outline of the presentation

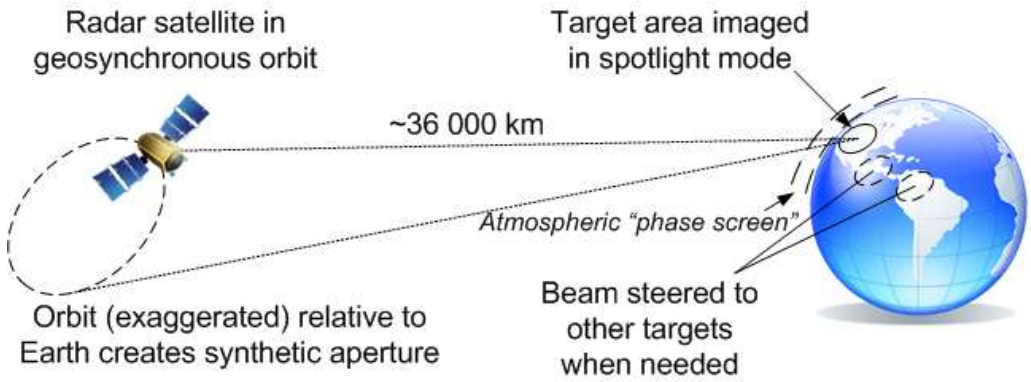

Geosynchronous Radar

1. Background
2. CEOI System and Applications Study
3. GeoSAR technologies
4. Applications
5. Summary

1. GeoSAR Background

Cranfield UNIVERSITY

	Visible	IR	Radar
LEO	✓	✓	✓
GEO	✓	✓	?

Earth observation uses LEO and GEO orbits, and the whole of the available spectrum – *except* GEO radar (so far)

GEO radar has been discussed for many years

- Excellent temporal sampling + continental coverage
- Powerfully complements LEO: "*system of systems*"

Current research

- USA, China – high power, wide coverage; demanding
- Europe – low power, targetted coverage; feasible

2. CEOI System and Applications Study

Current CEOI-funded project to assess GeoSAR mission design and potential applications

Mission Design

- System model – requirements, optimise mission design
- GeoSAR simulator – validate models, quantify performance

Applications

- Ground surface (e.g. subsidence, temporal change)
- Atmosphere: ionosphere (TEC) and / or troposphere (humidity) are measured at high spatial, temporal resolution
- Complementing LEO EO (esp. SAR)

GeoSAR Requirements: Atmosphere

Cranfield UNIVERSITY

GeoSAR must compensate for atmospheric effects (ionospheric TEC, tropospheric humidity)

These therefore become measurable

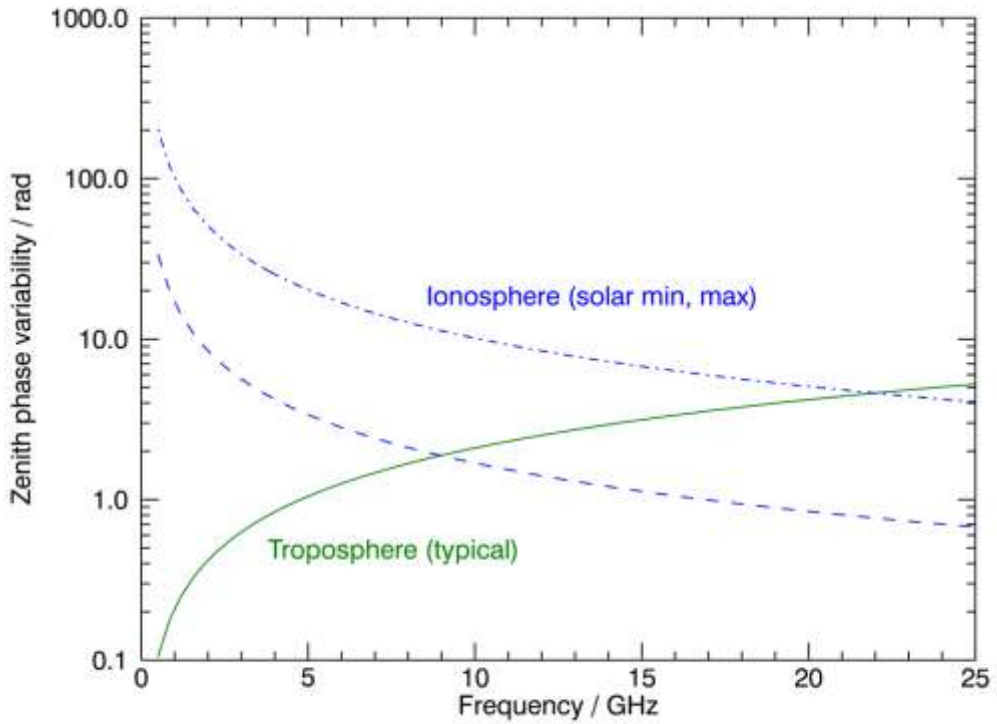

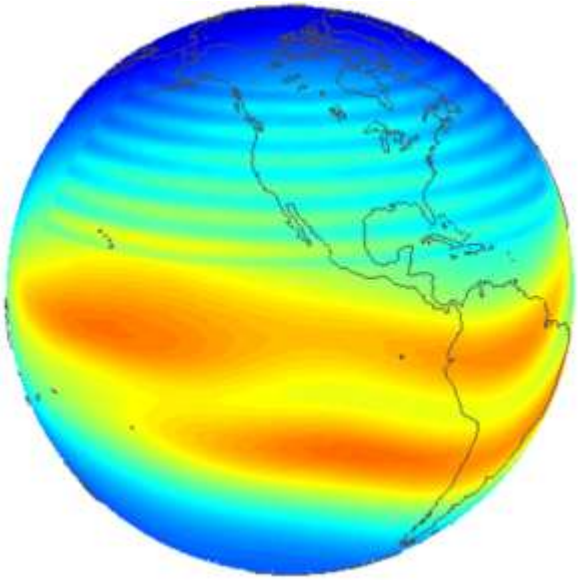

Measurement length + time-scales

Cranfield UNIVERSITY

Atmospheric variability sets measurement length and time-scales

Mission concept:

1. Frequent coarse images (atmosphere quasi-static)
2. Stable targets reveal phase screen changes
3. Compensate phase to focus fine SAR image

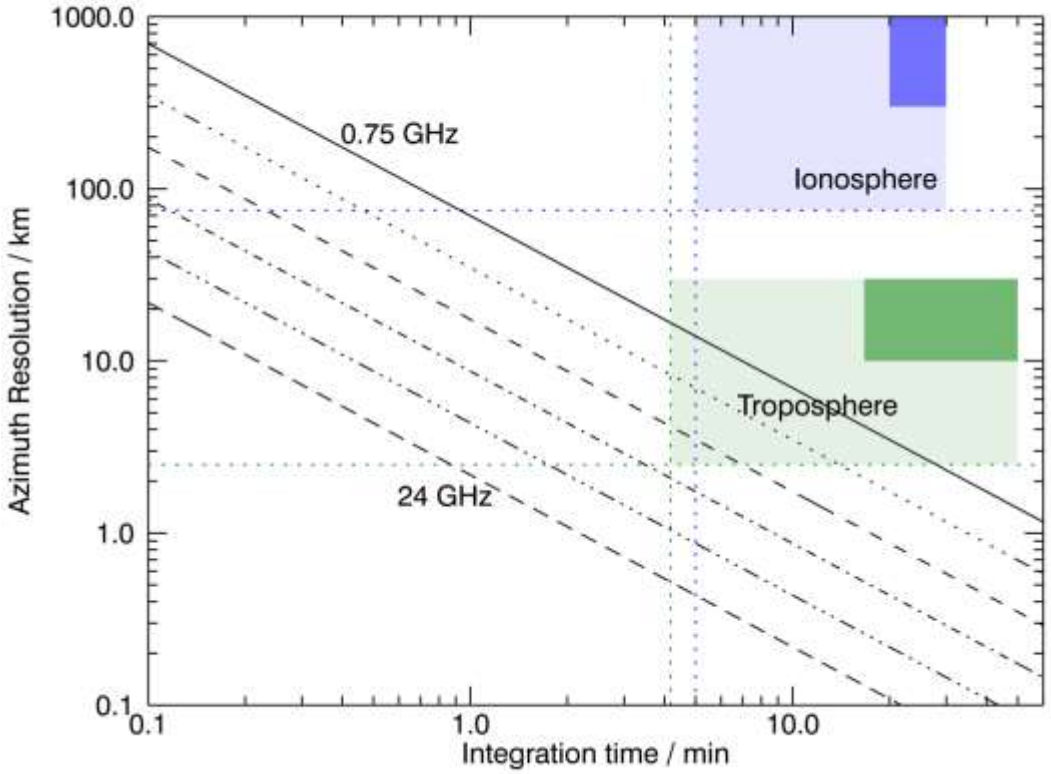

Image shows GeoSAR measurement capability for 50 km relative orbit diameter and various radar frequencies

Rates of atmospheric phase change

Cranfield UNIVERSITY

Coarse resolution images are averaged over ~km and few minutes

- Phase changes in space and time must be manageable
- Attenuation due to averaging should be minimised

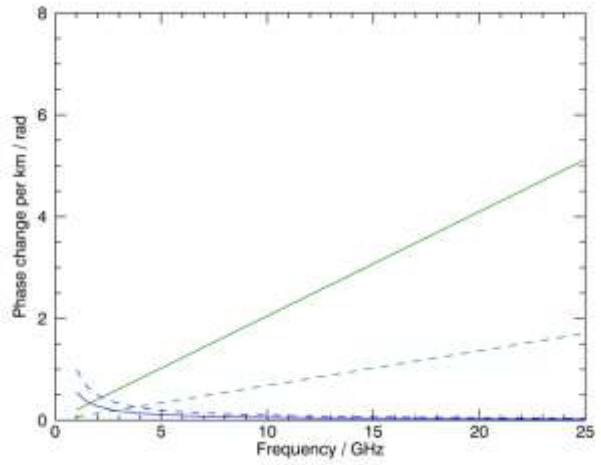

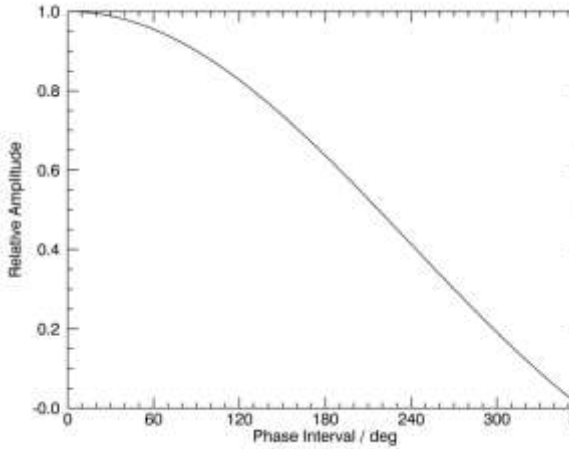

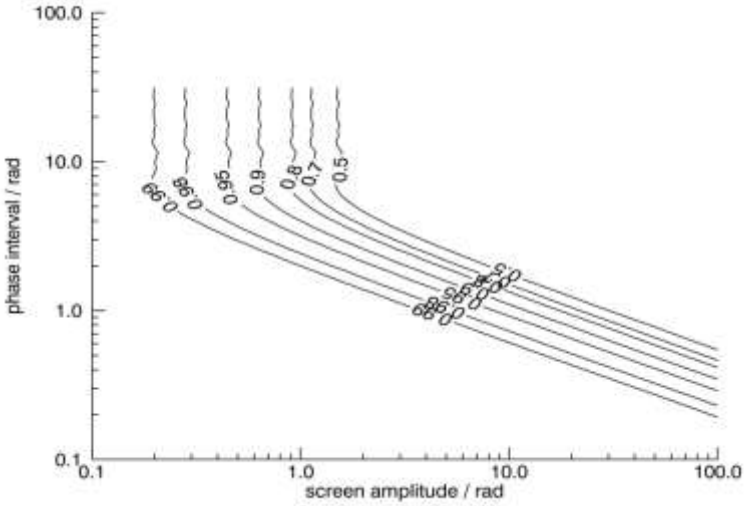

3. GeoSAR technologies

GeoSAR system model – validated ✓

GeoSAR simulator – validated ✓

- Captures system physics
- Validates performance calculations
- Evaluates measurement limits

Phase screen autofocus

- Phase correction demonstrated
- Based on data assimilation methodology

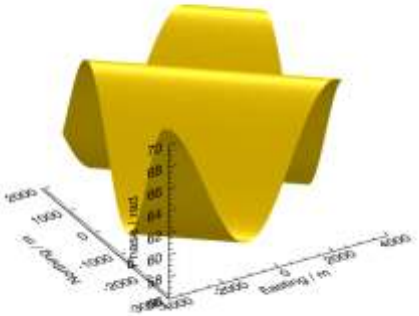

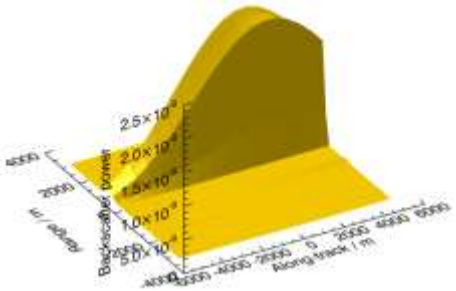

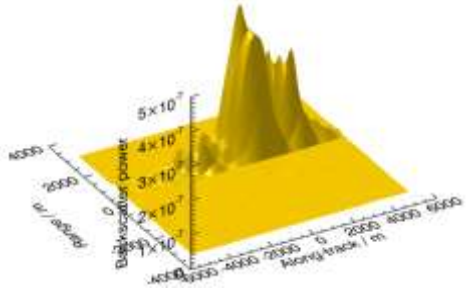

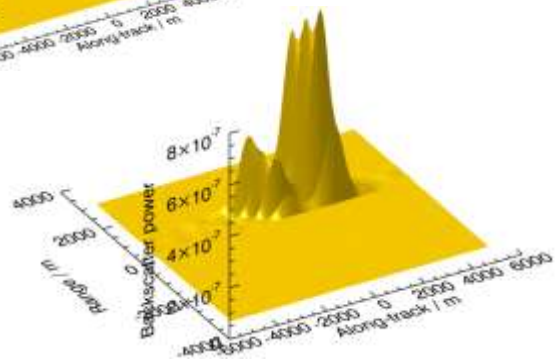

Image distortions

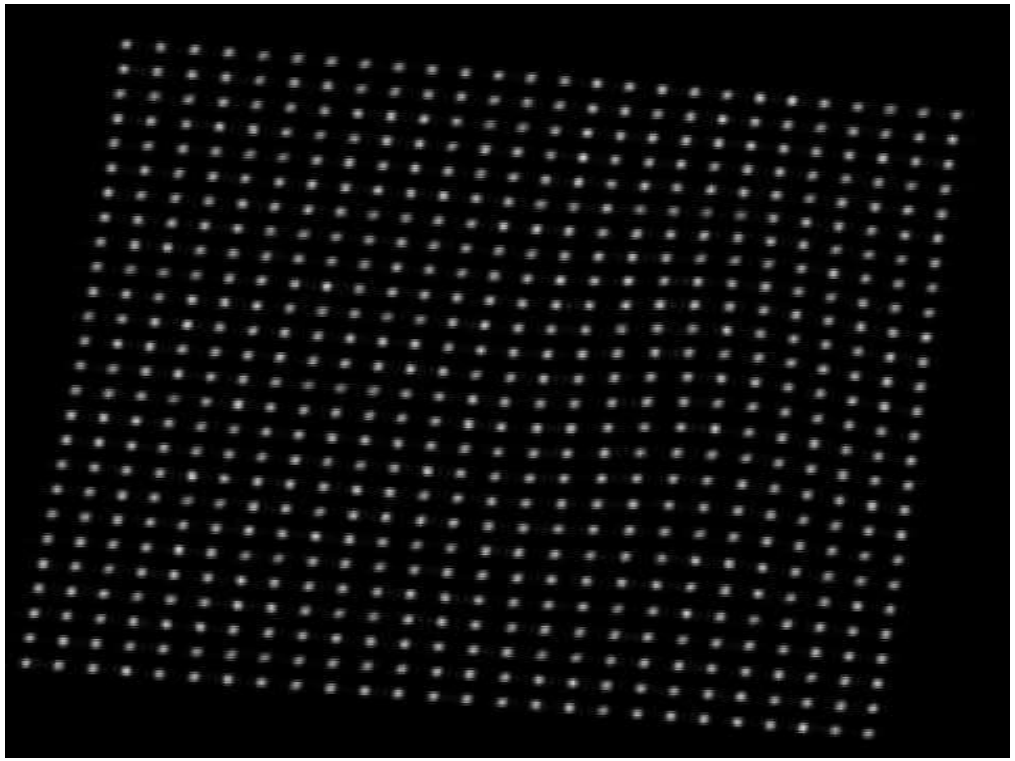

Changing atmosphere shifts target positions

Movie shows simulation of effects of troposphere on a 1 km mesh of point targets (~25 km square)

- Uses image every 100 s for 50 minutes

Atmosphere is measured by tracking similar strong targets in the image

4. GeoSAR applications

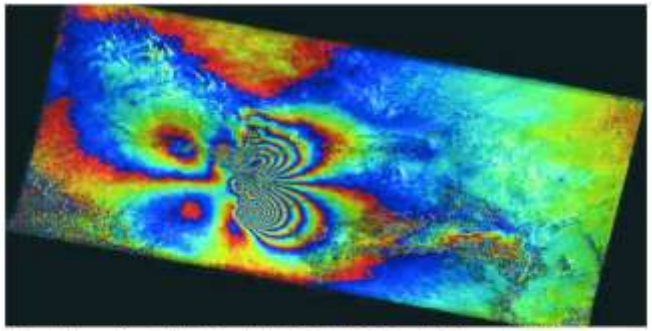

Envisat radar images of Bam (Iran) from before and after the Earthquake of 26 December 2003 combined in the 'interferogram' to reveal the ground movement. (Polimi/Polito)

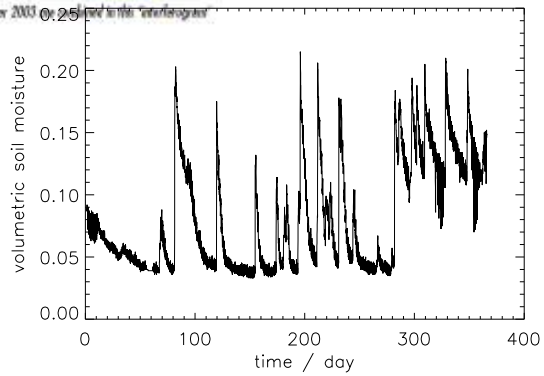

Potential applications include

Land surface

- Ground motion: subsidence, landslips
- Soil moisture (*example of process which is too rapid for direct observation with conventional EO*)

Complements LEO SAR, etc.

- High temporal resolution (including daily InSAR)
- Additional targets measured because of viewing geometry
- Target area motion observed in 3D: GeoSAR measures N-S motion, LEO SAR only sees E-W and vertical

GeoSAR Applications - atmosphere

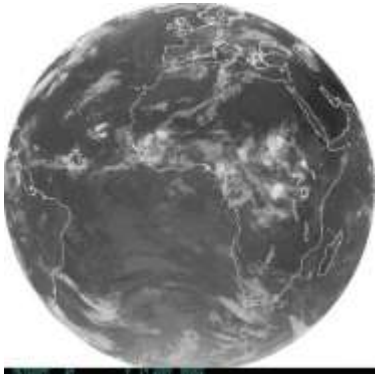

Cranfield UNIVERSITY

Frequent images obtained of atmosphere (resolution ~1 km every 3 min); radar frequency determines sensitivity to

- Ionosphere - TEC
- Troposphere – humidity

These images are useful for

- Near-real-time atmospheric corrections, therefore rapid delivery of high quality LEO InSAR data
- Meteorology or space weather; science
- High precision positioning (GPS), etc. …

5. Summary

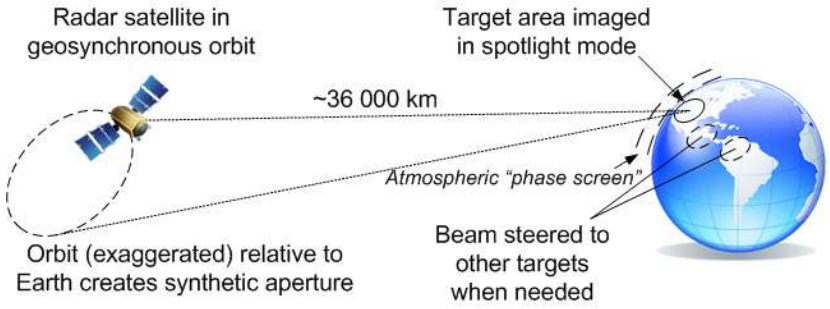

Radar from geosynchronous orbit

- Concept seems feasible (given suitable targets)
- Highly versatile imaging modes
  - User can trade spatial coverage and temporal resolution for imaging over continental scales
- Atmospheric data are a valuable by-product
- GeoSAR powerfully complements conventional EO
  - Contributes to a "system of systems"
- UK well-positioned for further work